

FIG. 1

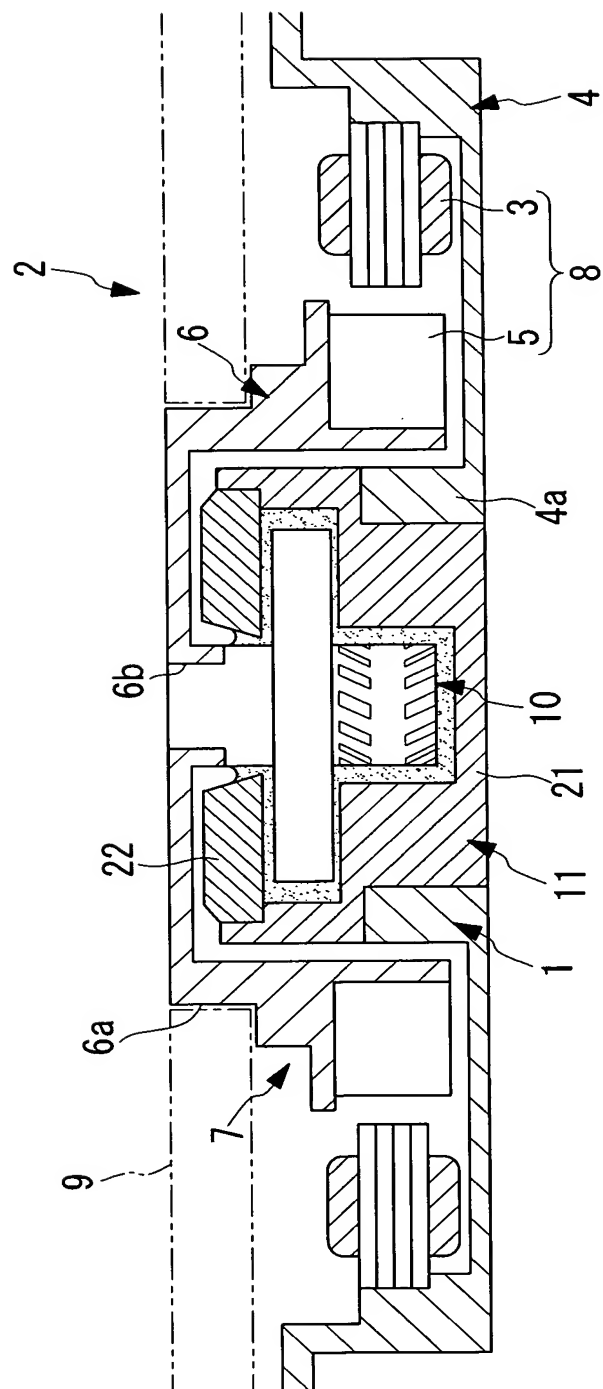


FIG. 2

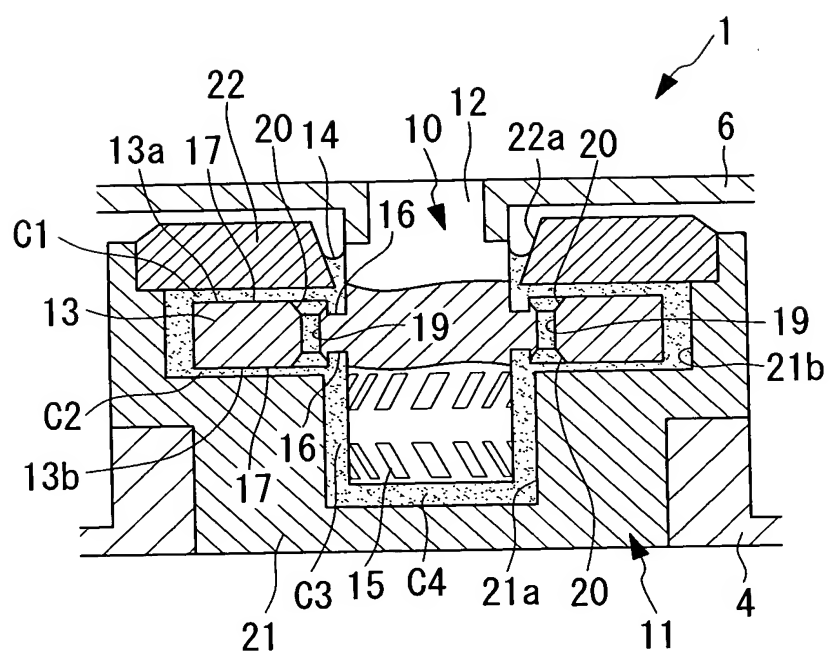


FIG. 3A

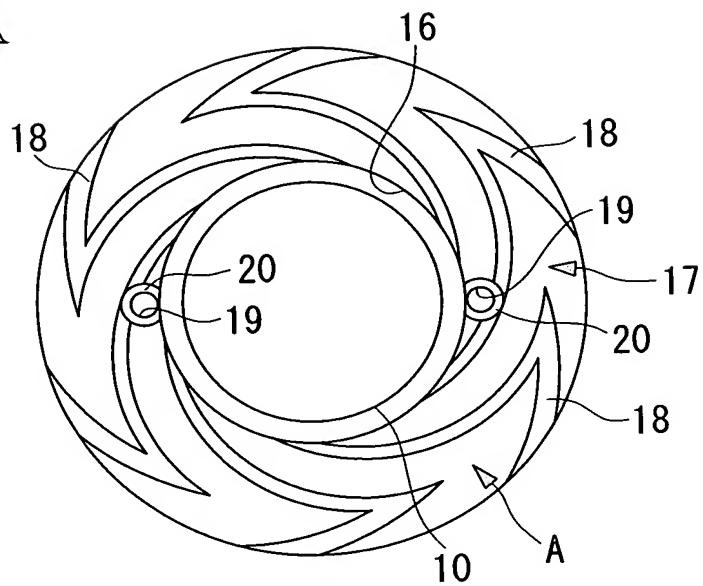


FIG. 3B

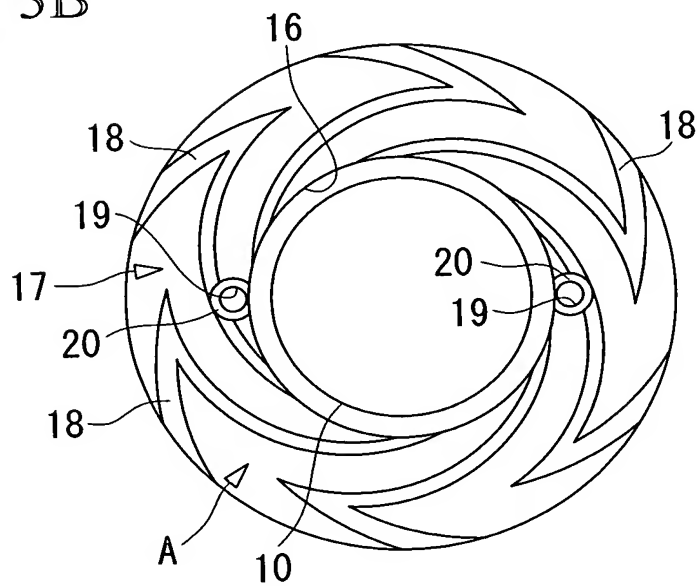


FIG. 4

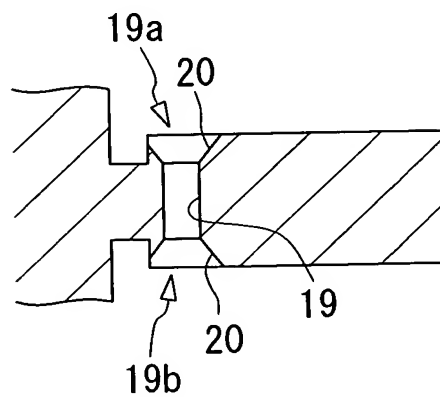


FIG. 5A

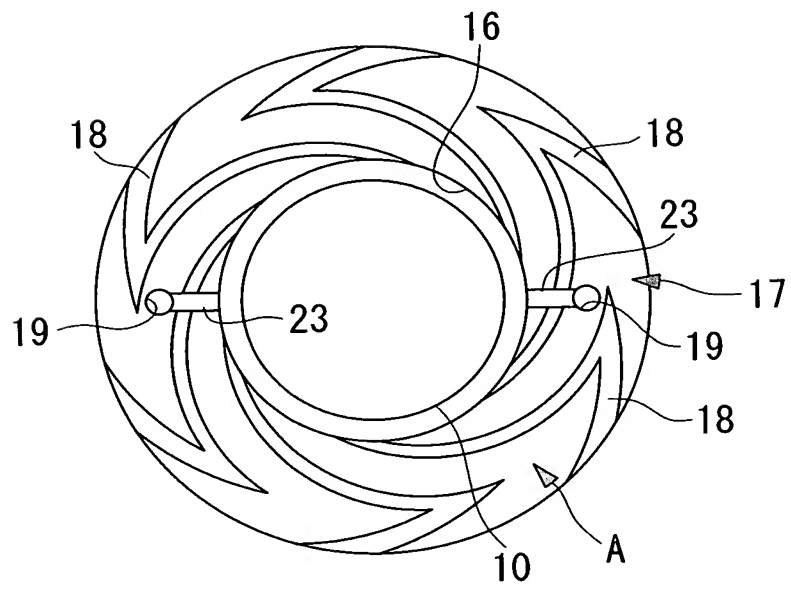


FIG. 5B

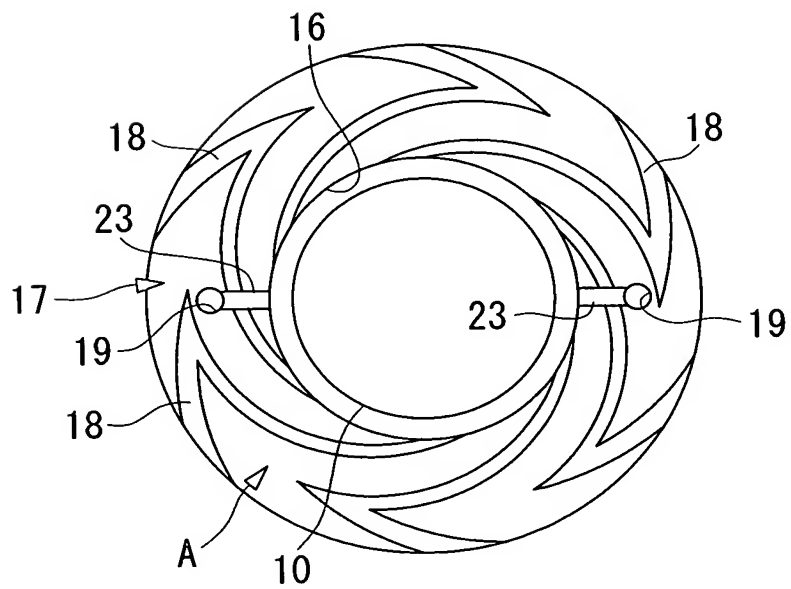


FIG. 6

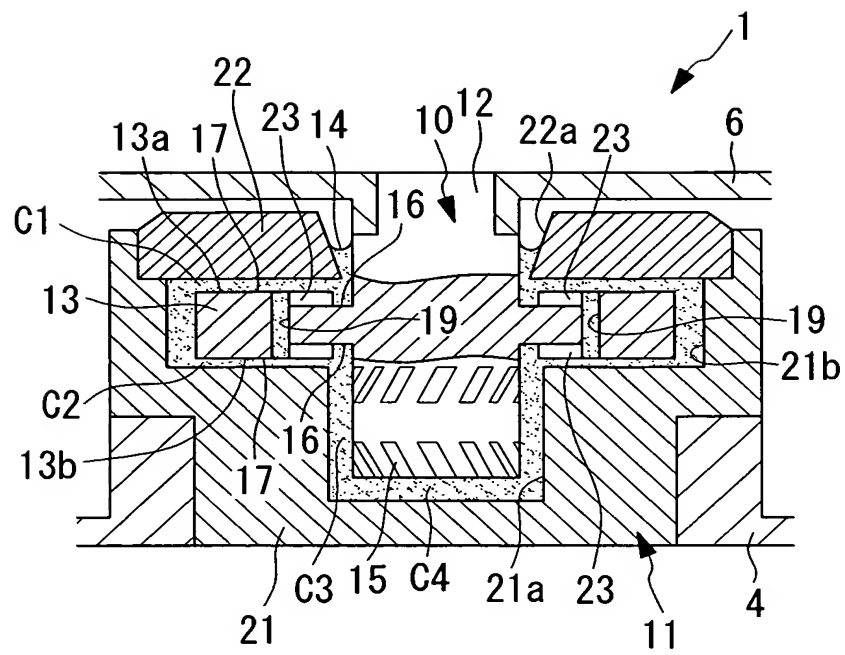


FIG. 7A

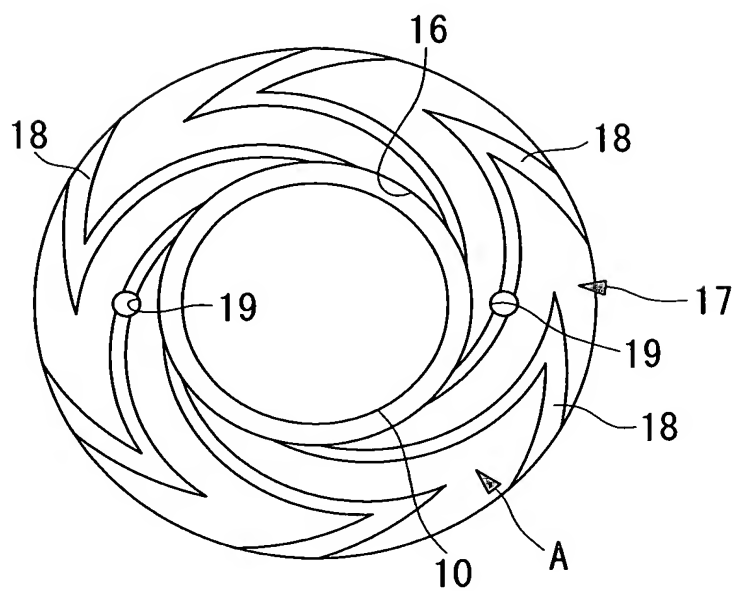


FIG. 7B

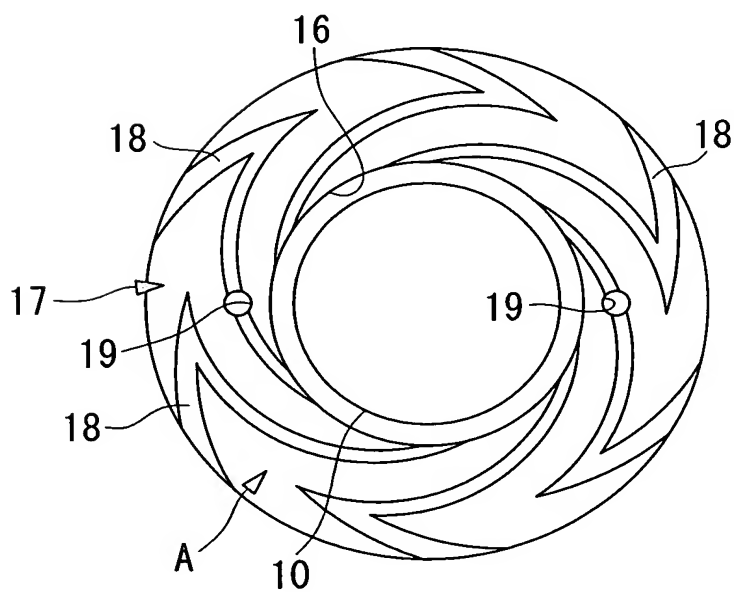


FIG. 7

A cross-sectional view of another embodiment of the device. It shows two rectangular cavities (10') separated by a central wall (12'). Each cavity contains a vertical rod (19) with a base (20). The rods are supported by a horizontal plate (16') at the bottom. The entire assembly is housed within a larger structure (11) with side walls (13') and a top cover (6). Various components are labeled with numbers and letters.

[illegible]

FIG. 11

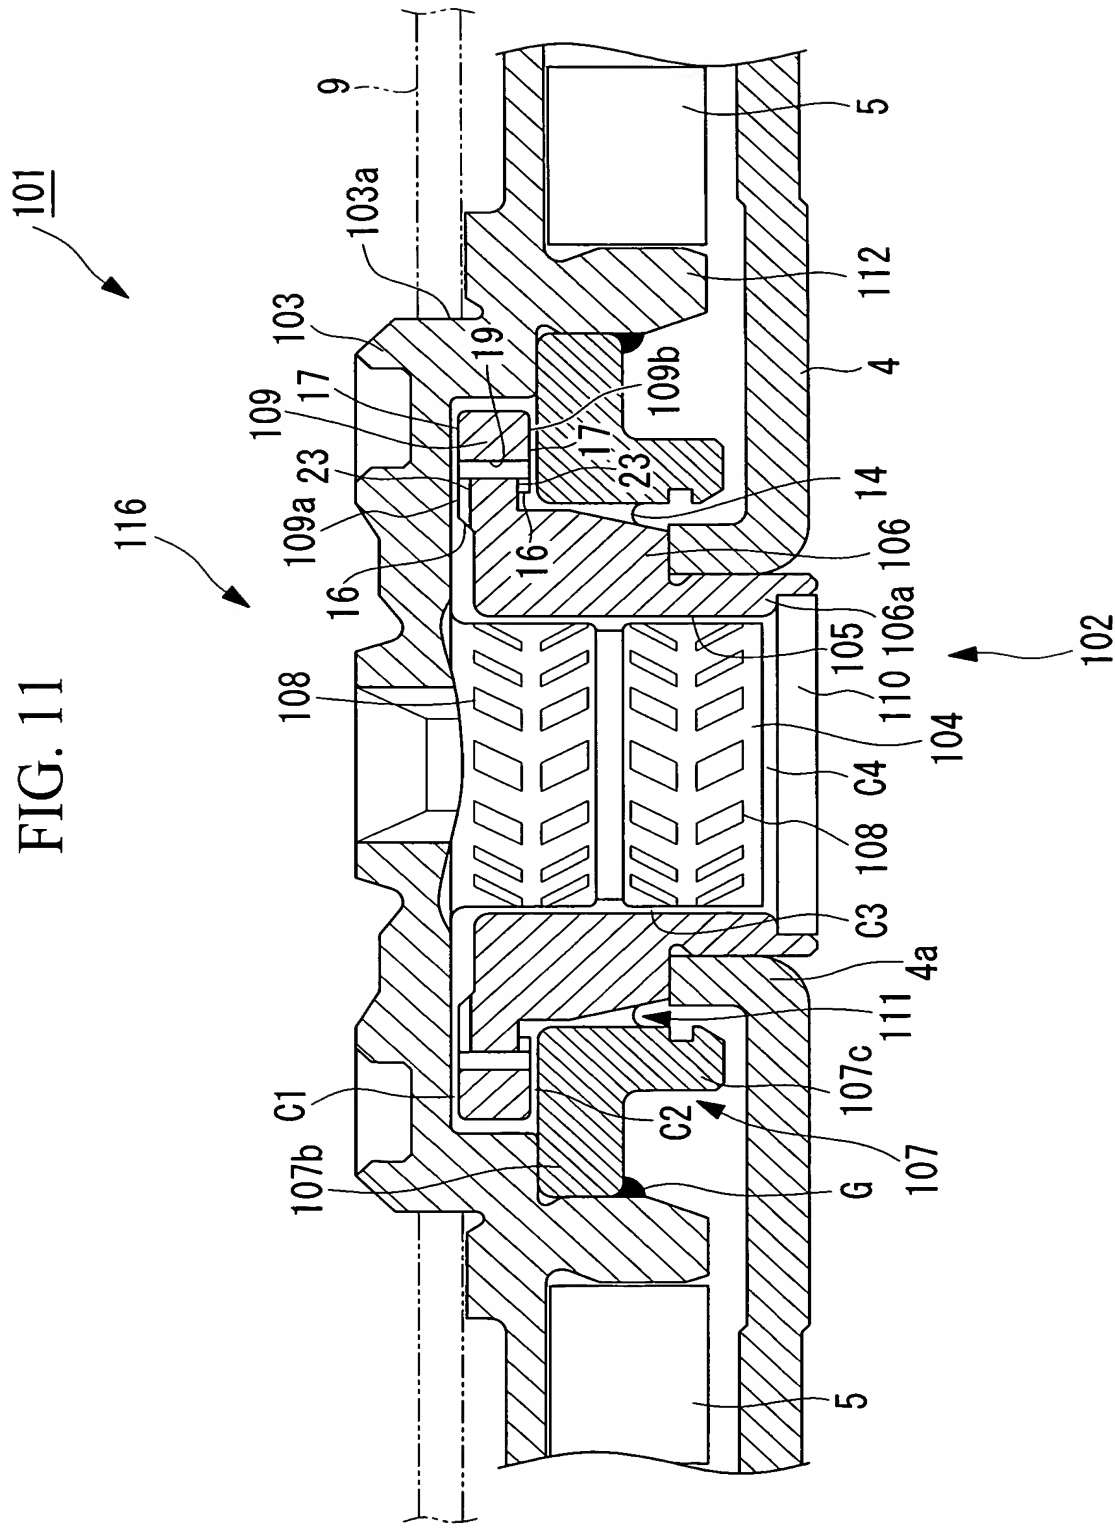


FIG. 12

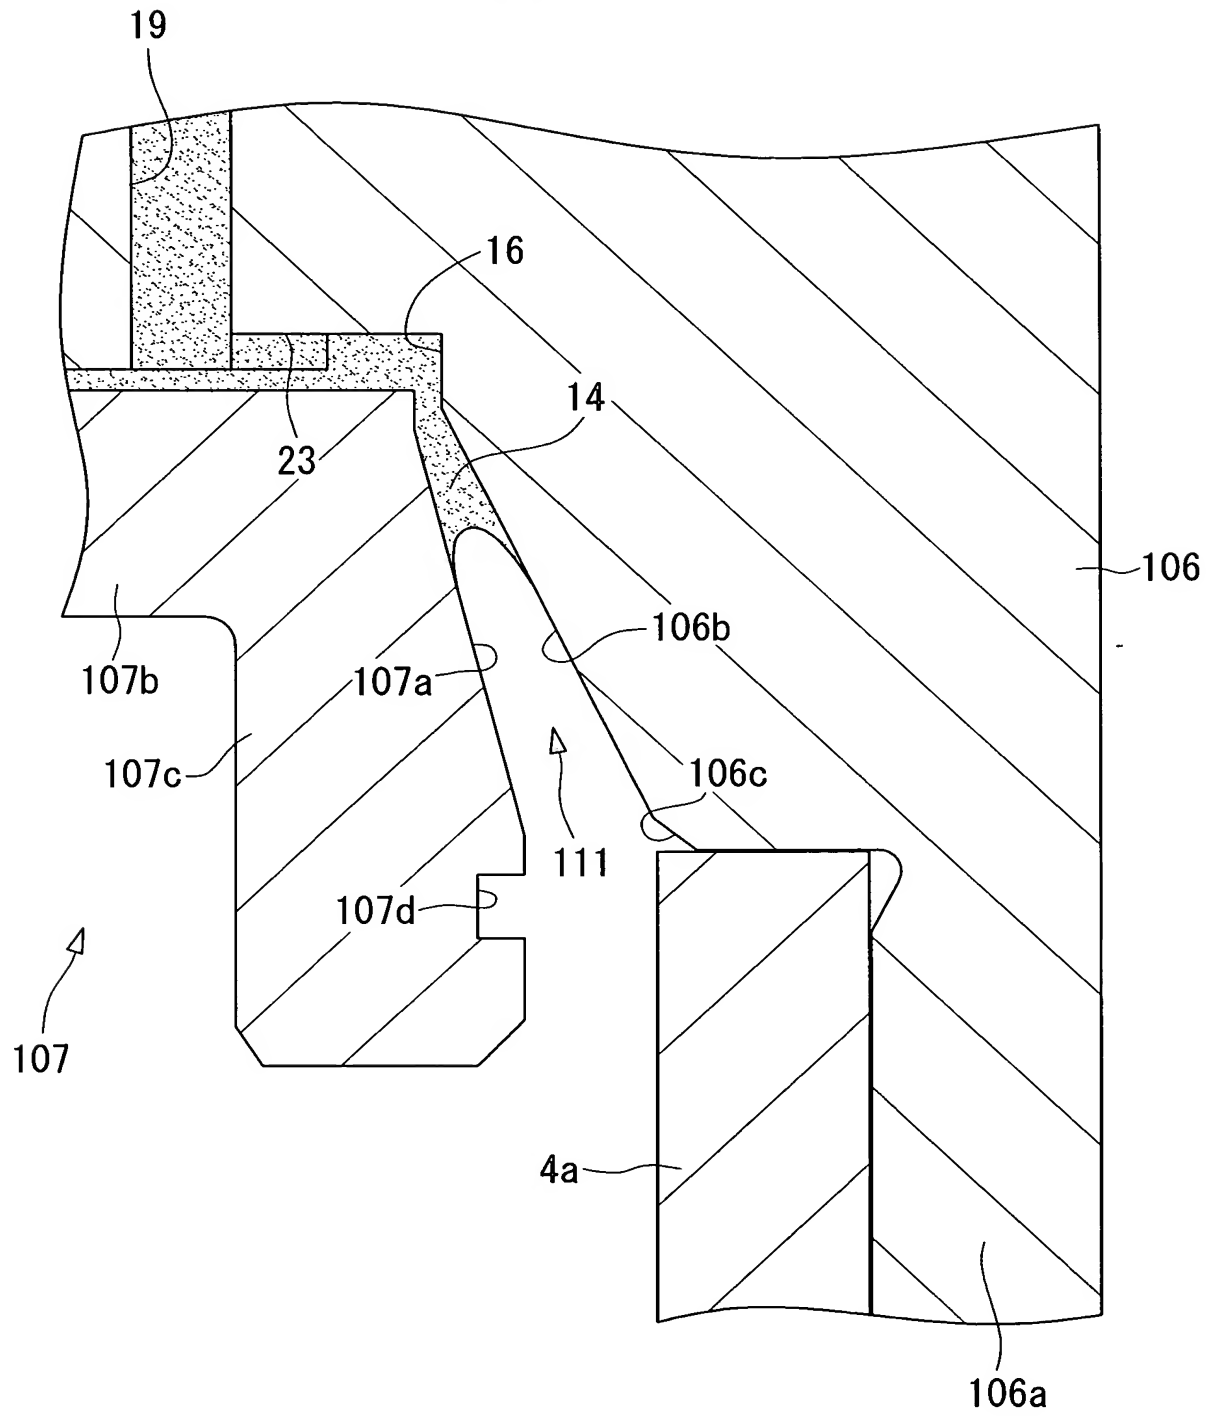


FIG. 13A

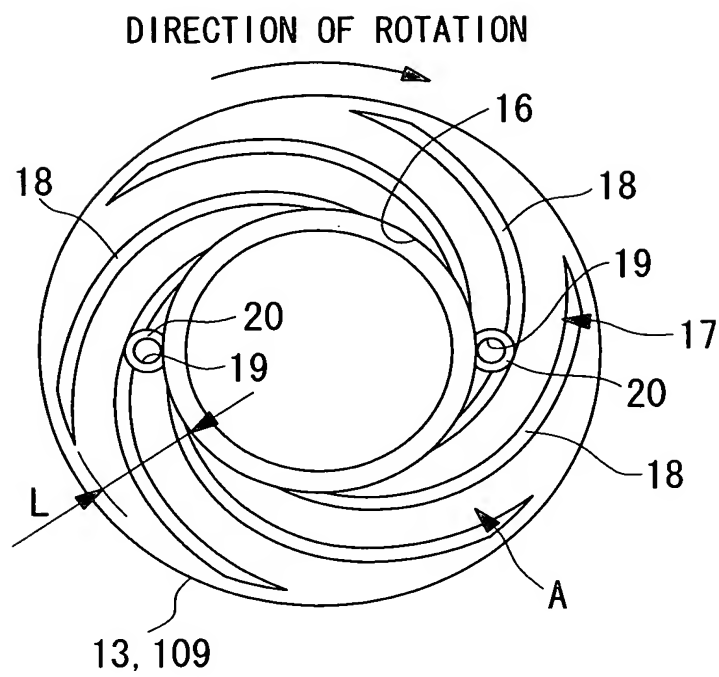


FIG. 13B

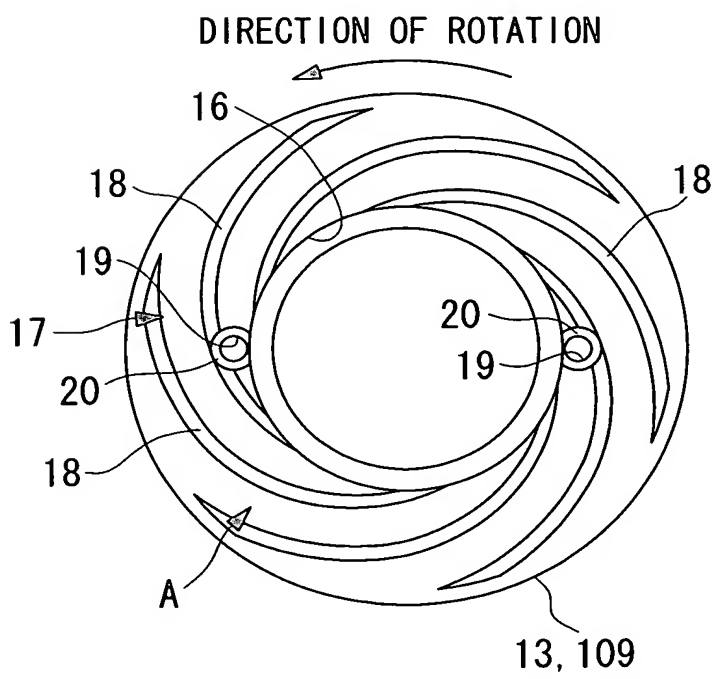


FIG. 14A

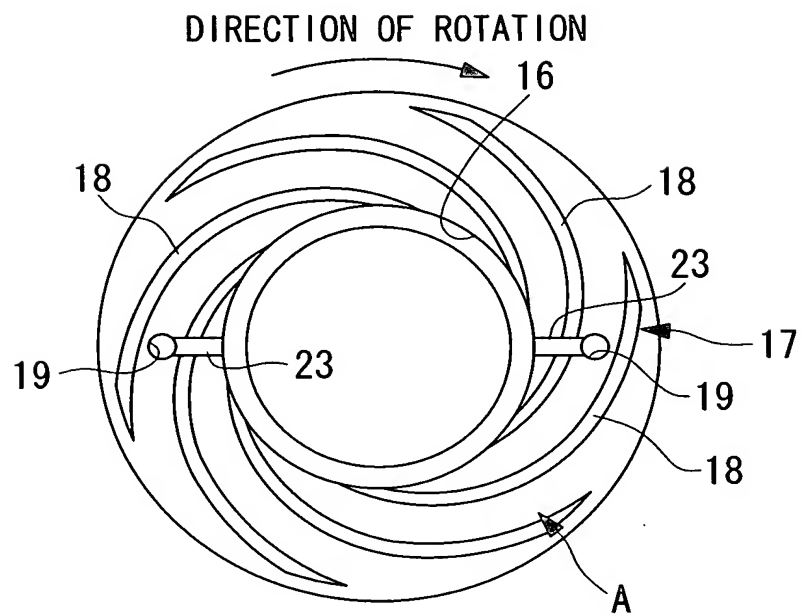


FIG. 14B

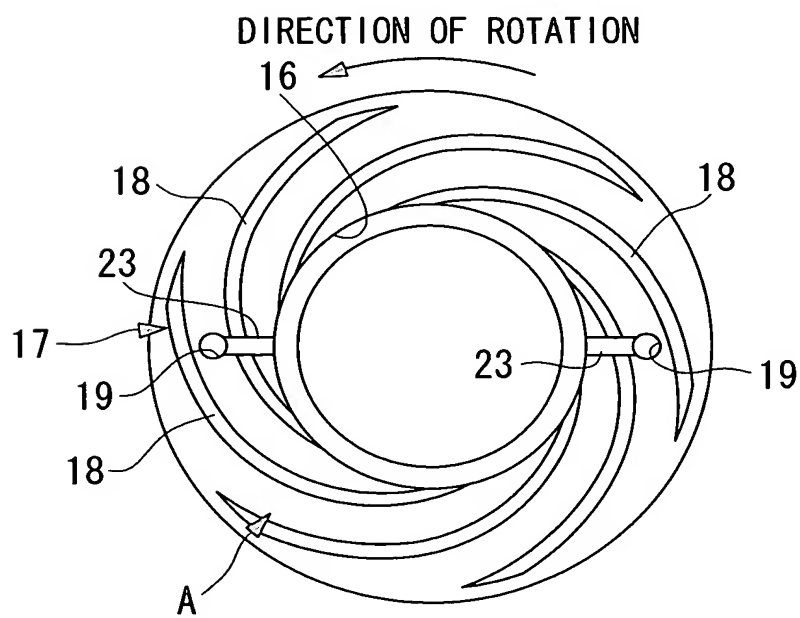


FIG. 15A

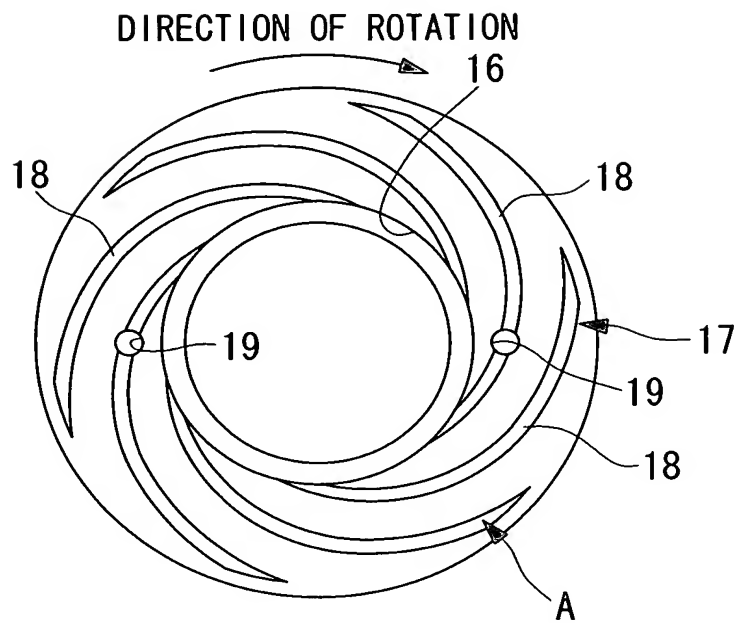


FIG. 15B

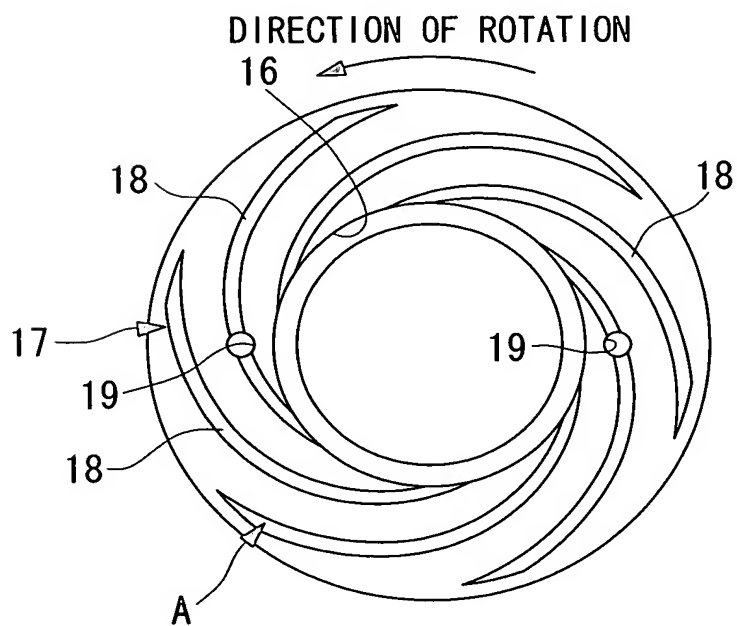


FIG. 16A

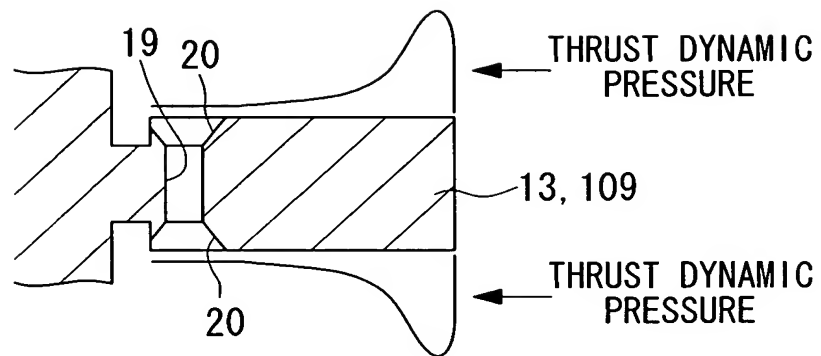


FIG. 16B

